


Product Highlights

- Operating temperature up to +80°C (+176°F)
- Tubular acoustic sleeve
- Prevents exposure of wires
- Excellent noise suppression
- Easy to install
- Extremely lightweight
- Abrasion resistant
- Excellent flexibility

Typical Applications

- Door harnesses
- Instrument panel harnesses
- Seat harnesses
- Roof harnesses

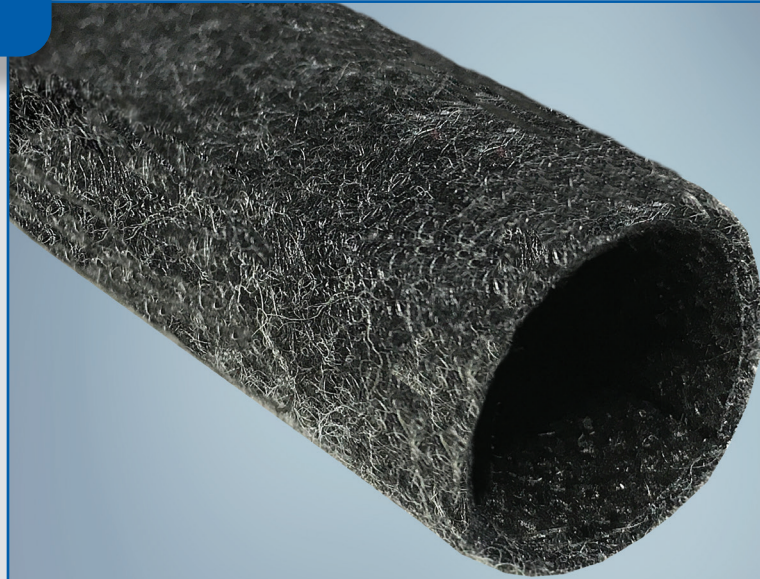

QuietSleeve® 3008 is a tubular protective sleeve designed to provide excellent noise suppression and abrasion resistance. Composed of a non-woven polyester and polypropylene scrim, the product is lightweight and its thickness provides superior noise suppression performance for rattling/rubbing noise caused by vibrations.

QuietSleeve 3008 has proper stiffness that facilitates harness insertion work into through holes. The product also has great weatherability, enabling it to be applied to areas in wetting risk such as door harnesses.

QuietSleeve 3008's unique design allows for quick and easy bundling of wire and cable assemblies. Compared to multiple component solutions such as vinyl tube and urethane foam, QuietSleeve 3008 provides a single product solution that reduces complexity and installation time.



Our manufacturing sites are certified ISO 9001, IATF 16949, or AS/EN 9100, ISO 14001 and ISO 45001 (Selected Sites)

Performance Data – QuietSleeve® 3008

Property	Test Method	Result
Temperature Rating	240 hours at +105°C (+80°C rating)	Pass +80°C (+176°F)
Low Temperature Flexibility	SAE J2192	Pass -40°C (-40°F)
Flammability	SAE J369	Self-extinguishing
Fluids Resistance	SAE J2192	Pass
Acoustic Performance	SAE J2192	Rubbing: > 25 dB Rattling: > 45 dB

All numeric performance data shows average or typical values. Please consult your sales representative for product drawings, test reports and OEM approvals.

Construction and Typical Product Characteristics

Outer layer: Polyester (PET) non-woven

Inner Layer: Polypropylene (PP) scrim

Standard Sizes

Commercial Product Name	Nominal size (mm)
QuietSleeve 3008 8	8
QuietSleeve 3008 10	10
QuietSleeve 3008 13	13
QuietSleeve 3008 16	16
QuietSleeve 3008 19	19
QuietSleeve 3008 25	25

Availability

Standard sizes are listed here. Additional sizes could be available upon request.

Available in custom cut lengths. Recommended cut lengths are in 5mm increments. Please see regional drawings for cut length tolerances.

Standard color is grey. Additional colors may be available.

Please consult your local sales representative for regional packaging details and standards.



United States: (1) 800 926 2472 • México: (52) 442 101 8100 • Brazil: (55) 19 3116 1600
EMEA: (33) 3 44 39 06 06 • Japan: (81) 45 330 0300 • China: (86) 21 6182 7560
Southeast Asia: (66) 35 276 400 • Korea: (82) 44 861 6368 • India: (91) 124 4784565
www.tennecosp.com



For informational purposes only. Tenneco makes no warranties as to the accuracy or completeness of the information provided herein and disclaims any liability in connection with its use. Tenneco's only obligations are those provided in its terms and conditions of sale for this product, and Tenneco will not be liable for any damages, whether direct or indirect, arising out of the use or misuse of this product. Users should undertake their own evaluations to determine the suitability of the product for specific applications. ©2020 Tenneco Systems Protection, manufacturer of Bentley-Harris protection products.

QS3008-NA(EN-LTR)A